

Late binding

Ch 15.3



Highlights

- Late binding for variables

```
Parent* x = new Child;
```

Review: Derived classes

Today we will deal more with inheritance

Mainly we will focus on how you can store a child class in a parent container (sort of)

```
Parent p = Child();
```

Questions we will answer:

What is this line of code doing exactly?

Are there other ways of doing this?

Early vs late binding

Static binding (or early) is when the computer determines what to use when you hit the compile button

Dynamic binding (late) is when the computer figures out the most appropriate action when it is actually running the program

Much of what we have done in the later parts of class is similar to late binding

Static binding

When you go to a fast-food-ish restaurant, you get one tray, regardless of what you order



The key is before they knew what you were ordering, they determined you needed one tray

Dynamic binding

When you order a drink, they do not just give you a standard cup and say “fill to this line”



Now, they have to react to what you want and give you the correct cup size (not a predetermined action, thus dynamic binding)

Static binding

Checking out at a grocery store, all items are scanned and added to the bill in the same way



The same program on the computer runs for all items and just identifies their price

Dynamic binding

After you pay, you put the food into bags (paper/plastic/your own)



What items go where depends on what you want to use and the item properties (weight, dampness, rigidity, etc.)

Static/dynamic binding

All animals need to mate, so we could build a generic `Animal` class with a function `mate()`

However, the gender roles in `mate()` are very different between species...



Static/dynamic binding

Consider this code:

```
int x = 2;  
cout << x << endl;
```

You know the output even before the program runs (you know at compile time = static)

While this code, you only know the output when the program runs (i.e. dynamic):

```
int y;  
cin >> y;  
cout << y << endl;
```

(See: compleVsRun.cpp)

Static/dynamic binding



static = rigid/constant

dynamic = flexible/adaptive

Static/dynamic binding

Static/dynamic binding is similar to how we originally made arrays: (static/early binding)

```
// need to know the size when compiling  
int x[20];
```

To dynamic memory arrays: (dynamic/late)

```
cin >> size;  
// may not know how big x is until this line  
int* x = new int[size];
```

Mini-quiz (ungraded)

```
class Parent {  
public: // bad bad bad  
    int x;  
};
```

```
class Child : public Parent {  
public: // bad bad bad  
    int y;  
};
```

What is in p at end of main()?

1. x=2
2. x=2, y=10
3. x=1, y=10
4. x=1

(Hint: what happens on this:)

```
int z = 2.5;
```


```
int main()  
{  
    Parent p;  
    p.x = 1;  
  
    Child c;  
    c.x = 2;  
    c.y = 10;  
  
    p=c;  
}
```

= between parent/child

It is debatable how we should interpret line:

```
p=c;
```

In C++ (not some other languages), this just copies the parts of the parent class over

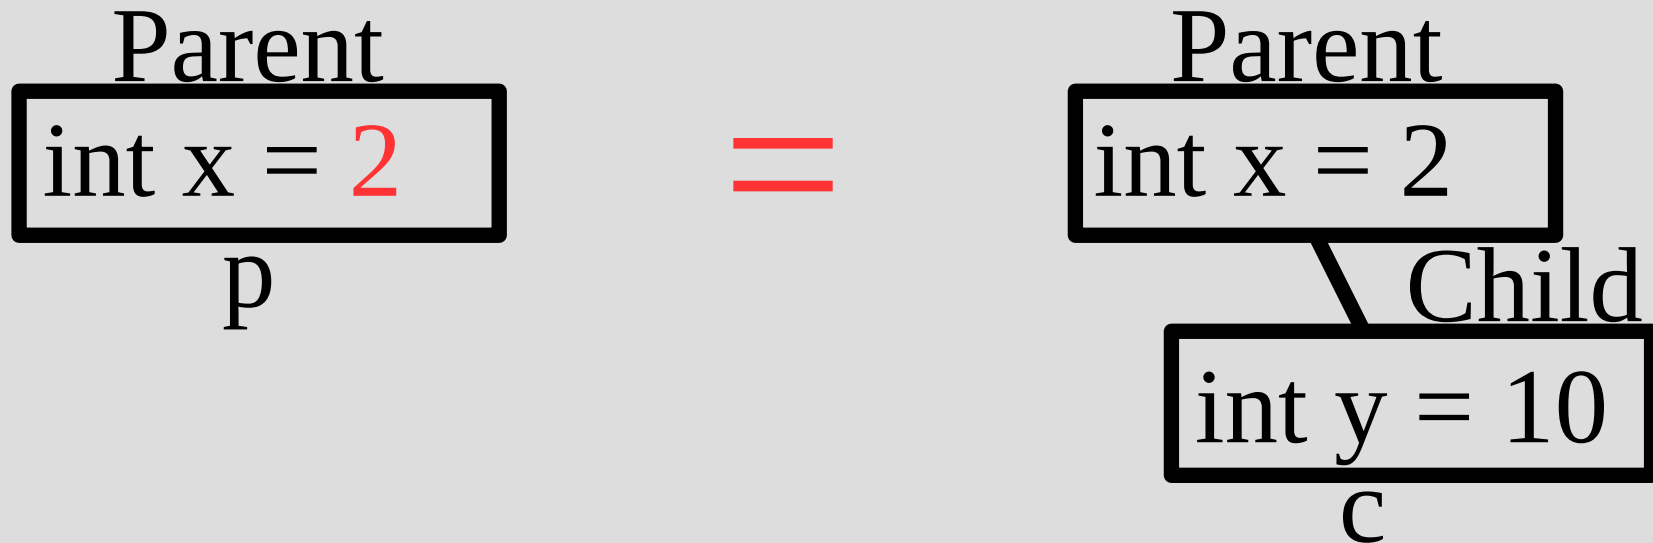

Mini-quiz (ungraded)

```
class Parent {  
public: // bad bad bad  
    int x;  
};
```

```
class Child : public Parent {  
public: // bad bad bad  
    int y;  
};
```

```
int main()  
{  
    Parent* p = new Parent;  
    p->x = 1;  
  
    Child* c = new Child();  
    c->x = 2;  
    c->y = 10;  
  
    p=c;  
}
```


What is at p now?

1. x=2
2. x=2, y=10
3. x=1, y=10
4. x=1

= between parent/child pointers

When the objects are pointers, lines line just changes the object being pointed to (but not any information inside either class)

```
p=c;
```

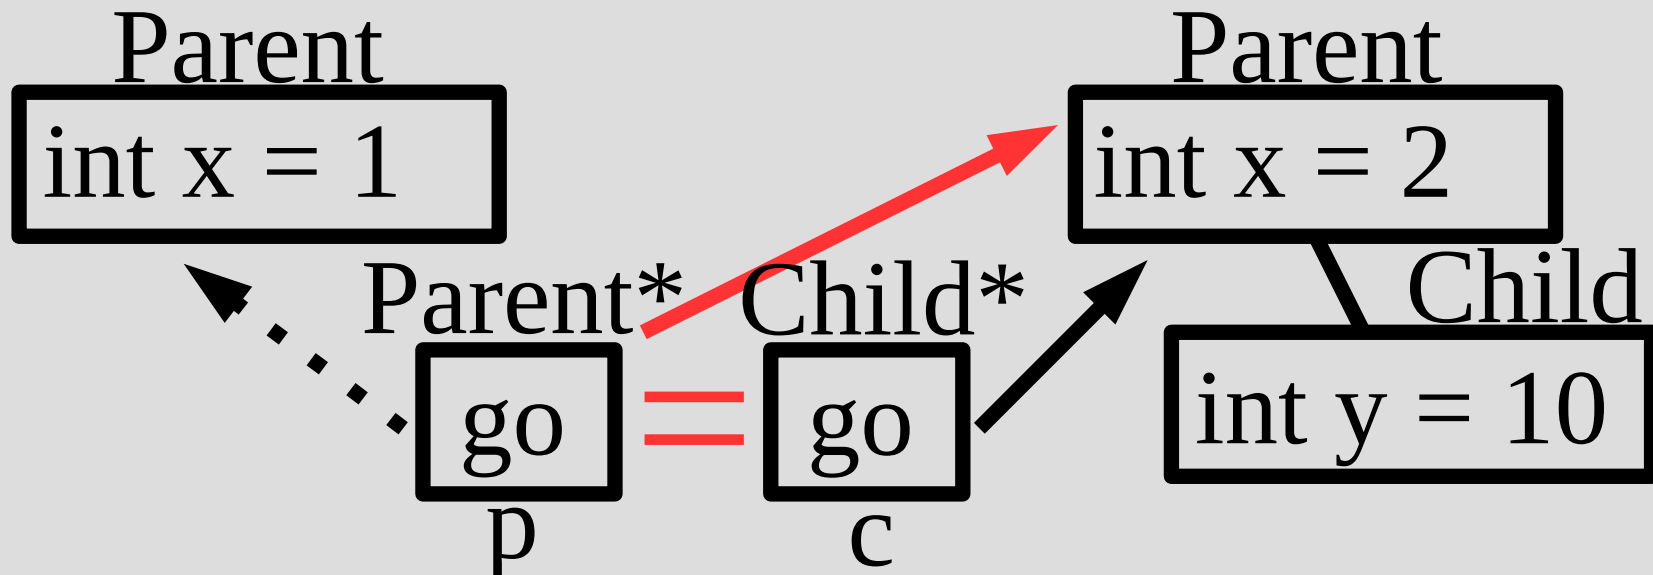

Dynamic variable binding

If a Parent type is pointing to a Child instance, we cannot directly access them (variables cannot be “virtual”...)

```
p->y = 20; // red angry underlines!
```

Instead, we have to tell it to act like a Child* by casting it: (bad practice as y public)

```
static_cast<Child*>(p) ->y = 20; // happy
```

(see: dynamicObject.cpp)

Dynamic variable binding

If p points to a Parent instance, the below line is VERY BAD (but it might work... sorta...)

```
Parent* p = new Parent;  
static_cast<Child*>(p)->y = 10; // happy..?
```

You will be fooling around in some part of memory that is not really associated p (though you might not crash...)

(see: badMemoryManagement.cpp)

(see: memoryOops.cpp)