

Informed Search (Ch. 3.5-3.6)



Announcements

- Test next week: will cover HW 1 & 2
- Ch 1-3 (up to A^* and admissibility)
 - Open book/notes

Heuristics

However, for A^* to be optimal the heuristic $h(\text{node})$ needs to be...

For trees: admissible which means:

$h(\text{node}) \leq \text{optimal path from h to goal}$

(i.e. $h(\text{node})$ is an underestimate of cost)

For graphs: consistent which means:


$h(\text{node}) \leq \text{cost}(\text{node to child}) + h(\text{child})$

(i.e. triangle inequality holds true)

(i.e. along any path, f-cost increases)

A*

Remember this?

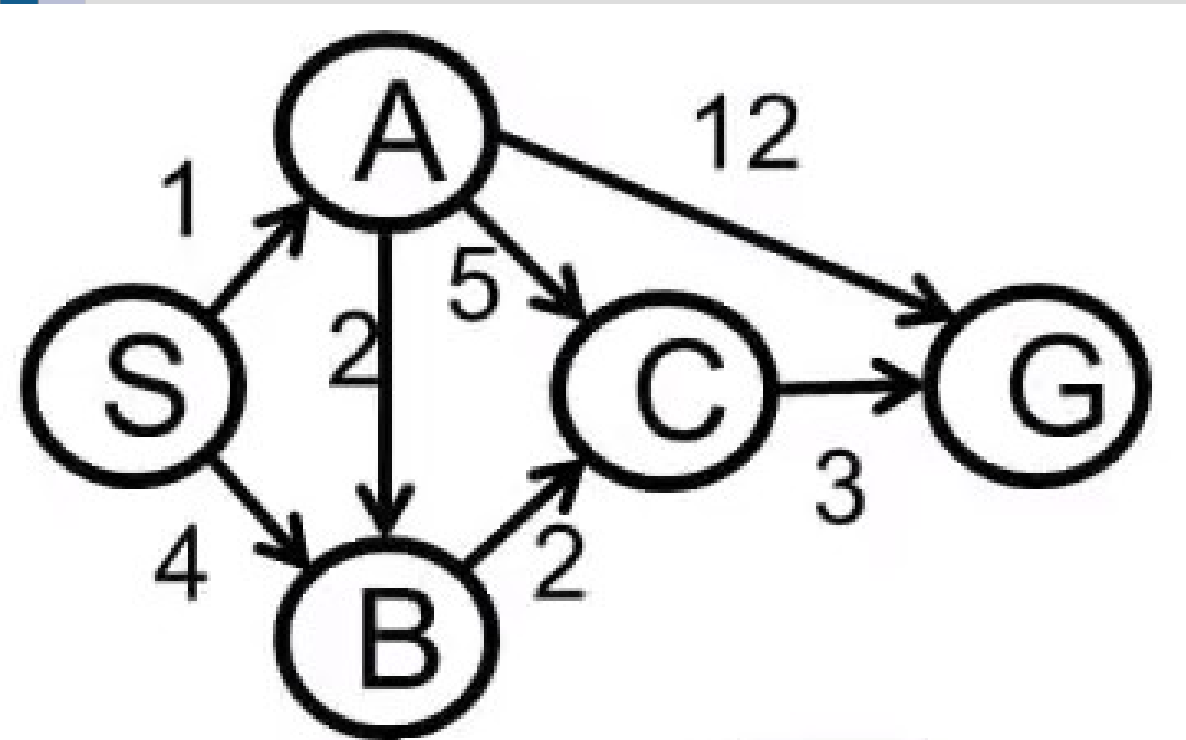

State	H
S	7
A	6
B	2
C	1
G	0

Not consistent (between S and B)

Heuristics

Consistent heuristics are always admissible
-Requirement: $h(\text{goal}) = 0$

Consistency is a strong requirement, so an admissible heuristics **might not** be consistent, but a consistent heuristic is always admissible

A^* is guaranteed to find optimal solution if the heuristic is admissible for trees (consistent for graphs)

Heuristics

In our example, the $h(\text{node})$ was the straight line distance from node to goal

This is an underestimate as physical roads cannot be shorter than this
(it also satisfies the triangle inequality)

Thus this heuristic is admissible
(and consistent)

Relaxation

The straight line cost works for distances in the physical world, do any others exist?

One way to make heuristics is to relax the problem (i.e. **simplify** in a useful way)

The optimal path cost in the relaxed problem can be a heuristic for the original problem (i.e. if we were not constrained to driving on roads, we could take the straight line path)

Relaxation

Let us look at 8-puzzle heuristics:

START			GOAL		
2	6	1	1	2	3
	7	8	4	5	6
3	5	4	7	8	

The rules of the game are:

You can swap any square with the blank

Relaxed rules:

1. Teleport any square to any destination
2. Move any square 1 space (overlapping ok)

Relaxation

1. Teleport any square to any destination

Optimal path cost is the number of mismatched squares (blank included)

2. Move any square 1 space (overlapping ok)

Optimal path cost is Manhattan distance for each square to goal summed up

Which one is better? (Note: these optimal solutions in relaxed need to be computed fast)

Heuristics & Branching Factor

h_1 = mismatch count

h_2 = number to goal difference sum

d	Search Cost			Effective Branching Factor		
	IDS	$A^*(h_1)$	$A^*(h_2)$	IDS	$A^*(h_1)$	$A^*(h_2)$
2	10	6	6	2.45	1.79	1.79
4	112	13	12	2.87	1.48	1.45
6	680	20	18	2.73	1.34	1.30
8	6384	39	25	2.80	1.33	1.24
10	47127	93	39	2.79	1.38	1.22
12	364404	227	73	2.78	1.42	1.24
14	3473941	539	113	2.83	1.44	1.23
16	–	1301	211	–	1.45	1.25
18	–	3056	363	–	1.46	1.26
20	–	7276	676	–	1.47	1.27
22	–	18094	1219	–	1.48	1.28
24	–	39135	1641	–	1.48	1.26

Heuristics & Branching Factor

The real branching factor in the 8-puzzle:

2 if in a corner

3 if on a side

4 if in the center

(Thus larger “8-puzzles” tend to 4)

An effective branching factor finds the “average” branching factor of a tree (smaller branching = less searching)

Heuristics & Branching Factor

The effective branching factor is defined as:

$$N = b^* + (b^*)^2 + (b^*)^3 + \dots + (b^*)^d$$

... where:

N = the number of nodes (i.e. size of fringe + size of explored)

b^* = effective branching factor (to find)

d = depth of solution

No easy formula, but can approximate:

$$N^{1/(d+1)} \leq b^* \leq N^{1/d}$$

Heuristics & Branching Factor

A^* search then has the following properties:

If b^* is the effective branching factor:

1. Completeness: Complete
2. Optimality: Optimal (if tree & admissible or graph & consistent)
3. Time complexity: $(b^*)^d$ (Note: $b^* < b$)
4. Space complexity: $(b^*)^d$

Combining Heuristics

h2 has a better branching factor than h1, and this is not a coincidence...

$h2(\text{node}) \geq h1(\text{node})$ for all nodes, thus we say h2 dominates h1 (and will thus perform better)

If there are multiple non-dominating heuristics: h1, h2... Then $h^* = \max(h1, h2, \dots)$ will dominate h1, h2, ... and will also be admissible /consistent if h1, h2 ... are as well

Combining Heuristics

If larger is better, why do we not just set $h(\text{node}) = 9001$?

Combining Heuristics

If larger is better, why do we not just set $h(\text{node}) = 9001$?

This would (probably) not be admissible...

If $h(\text{node}) = 0$, then you are doing the uninformed uniform cost search

If $h(\text{node}) = \text{optimal_cost}(\text{node to goal})$ then will **ONLY** explore nodes on an optimal path

Combining Heuristics

You cannot add two heuristics ($h^* = h_1 + h_2$), unless there is no overlap (i.e. h_1 cost is independent of h_2 cost)

For example, in the 8-puzzles:

h_3 : number of 1, 2, 3, 4 that are misplaced


h_4 : number of 5, 6, 7, 8 that are misplaced

There is no overlap, and in fact:

$h_3 + h_4 = h_1$ (as defined earlier)

Heuristics Exercise

Cannibals & missionaries problem:

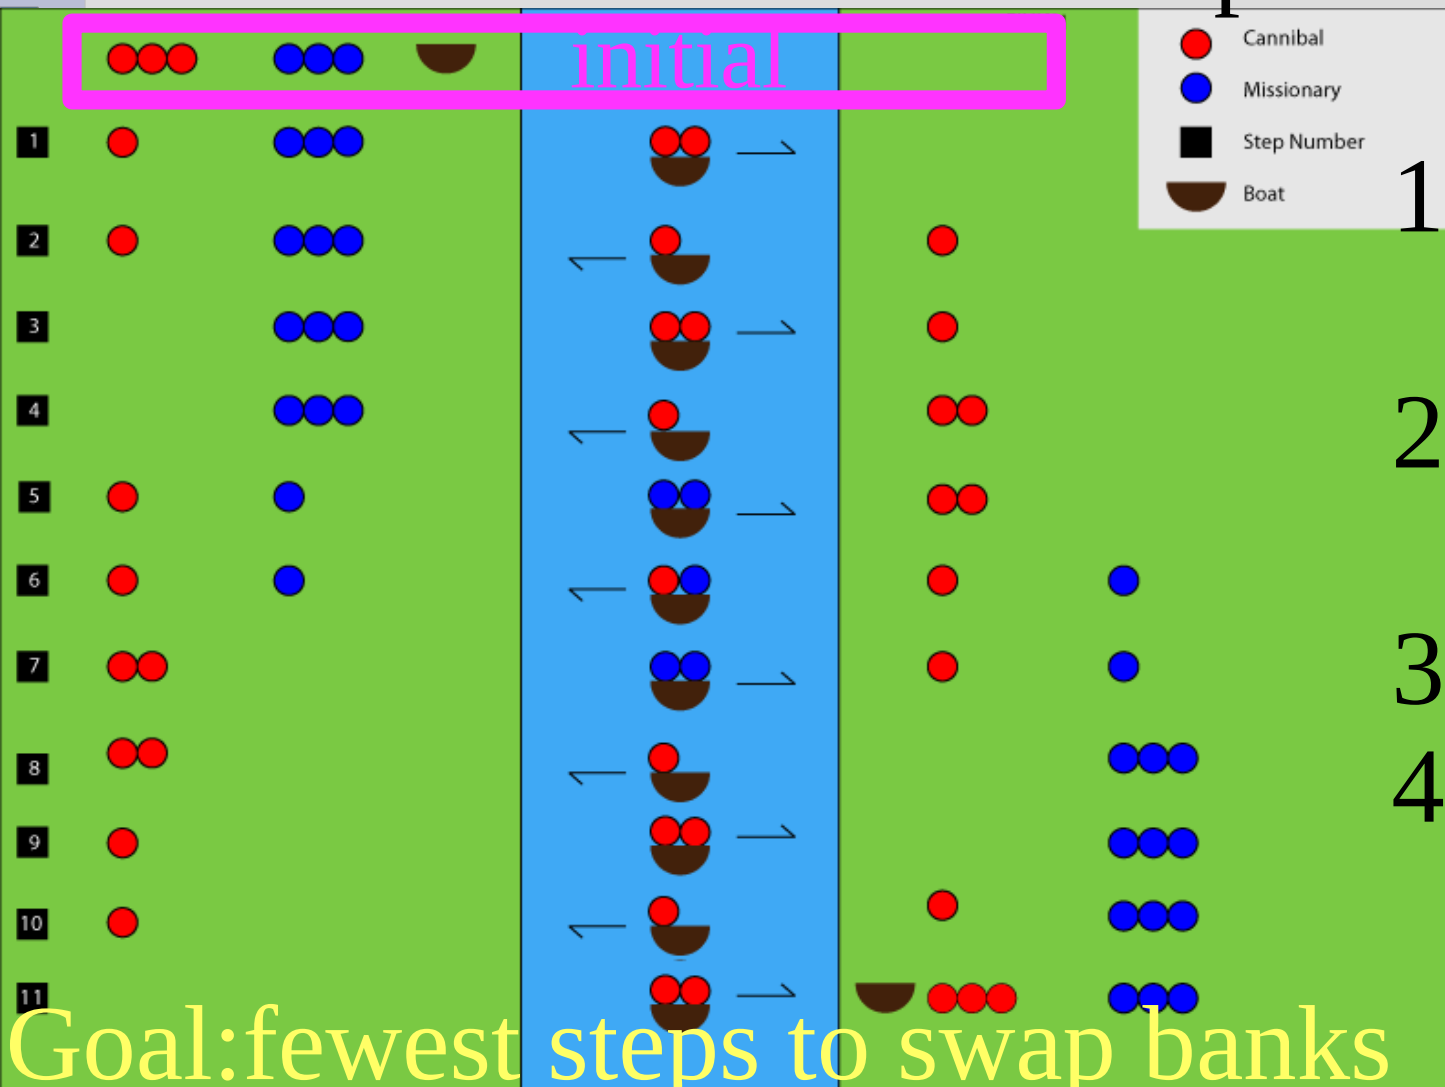

Rules:

1. Either bank: $m \geq c$, if $m > 0$
2. 2 ppl in boat max
3. Start: 3m & 3c
4. Need 1 in boat to move

Goal: fewest steps to swap banks

Heuristics Exercise

What relaxation did you use? (sample)

Make a heuristic for this problem

Is the heuristic admissible/consistent?

Heuristics Exercise

What relaxation did you use? (sample)

Remove needing person in boat to move

Make a heuristic for this problem

$$h1 = 2 * \lceil \frac{\text{number people on left}}{2} \rceil - 1 (+1 \text{ if boat on right})$$

as you can move 2 people across in 2 steps

Is the heuristic admissible/consistent?

YES! The point of relaxing guarantees admissibility!

Heuristics Exercise 2

UPS needs to send packages from a depot to houses using a fixed number of trucks

The trucks need to choose which houses and in which order they are going to visit. After delivering to all the houses, the trucks must return to the depot

The goal is to minimize the distance traveled by all the trucks

Heuristics Exercise 2

This is a sample answer


The problem is not the turning directions but rather the job distribution



Heuristics Exercise 2

Relax two rules:

1. Trucks don't need to go back to depot at end
2. Trucks can teleport to any place they have already been

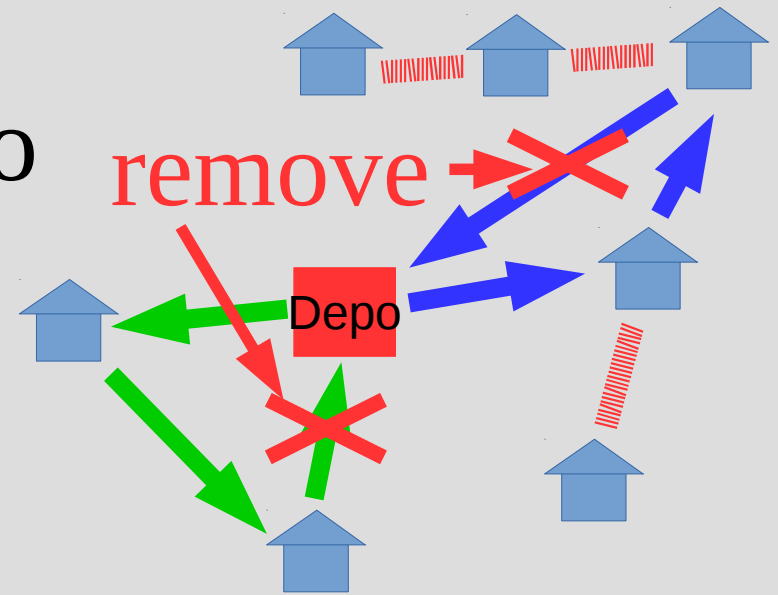

This lets you build a minimum spanning tree from your current graph and let this be the total estimated cost(after removing return edge)