

C Language Basics

CSci 2021: Machine Architecture and Organization
September 7th-12th, 2018

Slides and Instructor: Stephen McCamant

1

A history of C in one slide

- **First developed in the early 1970s for Unix**
 - Originally by Dennis Richie, descended from BCPL and B
 - Made Unix one of the first OSes not written in assembly
 - Defined in a book by Kernighan and Richie (K&R)
- **Popularity grew with Unix, then for microcomputers**
- **Standardized by ANSI/ISO in 1989/1990**
- **Object-oriented variants appeared in the 1980s:**
 - Objective-C and C++
 - Java in turn derives largely from C++, in the 1990s
- **Further standards in 1999 (C99) and 2011 (C11)**

3

C as compared with C++ and Java

- **Unlike Java and C++, C does not have:**
 - Classes
 - Packages/namespaces
 - Templates/generics
 - Exceptions
 - Operator or function overloading
 - Anonymous functions/closures/lambda
 - A rich standard data-structure library
- **Unlike Java, C allows potentially-unsafe operations:**
 - Uninitialized variables and memory
 - Out-of-bounds array accesses
 - Creating pointers from integers
 - Deallocating memory that is still in use

4

C programs are made up of functions

- **The primary unit of structure is a function**
 - AKA "procedure", "subroutine"

```
type name ( type arg , type arg )  
{  
    statements  
}
```

```
int add(int arg1, int arg2)  
{  
    return arg1 + arg2;  
}
```

5

Hello world in detail

standard library function
declarations

```
#include <stdio.h>  
  
int main(int argc, char **argv) {  
    printf("Hello, world!\n");  
    return 0;  
}
```

standard library function
to print a message

command-line arguments

6

Return values and prototypes

- Functions can return a value with a `return` statement
- No return value, or no arguments, are signified by the keyword `void`
- To tell the compiler about a function without defining it, use a write a function prototype:

```
int add(int arg1, int arg2);
```
- In a single file program, prototypes mostly not needed if functions are defined lower-level first
 - But, give stylistic freedom to change function order

7

Numeric types

- Integer types:

Type name	Common minimum size
<code>char</code>	8 bits
<code>short</code>	16 bits
<code>int</code>	32 bits
<code>long</code>	32 bits – for us, 64 bits
<code>long long</code>	64 bits

- “unsigned” variants cannot be negative
- Common floating point types:
 - `float`: usually 32 bits
 - `double`: usually 64 bits

8

Characters

- `char`'s name comes from representing characters
- Actually three types:
 - `signed char`, -128 to 127
 - `unsigned char`, 0 to 255
 - `char`, might be either signed or unsigned
- On almost all systems, values 0-127 represent ASCII
 - US-standardized code for roman alphabet, numbers, symbols, etc.
- Wider variety of standards for meanings of 128-255
 - Windows-1252, Latin-1: add accented letters and a few symbols
 - UTF-8: multiple bytes represent >100,000 Unicode characters
- Escape sequences starting with `\` for hard-to-type ones:
 - E.g., `'\n'` for newline, `'\0'` for character zero

9

Declaration, initialization, assignment

- A new variable is introduced with a *declaration*:

```
int weight, height;
```

- Optionally, give it a value by including an *initialization*:

```
int score = 100;
```

- An assignment statement changes the value of an already-declared variable:

```
score = score - 5;
```

10

Intermission: ChimeIn

- I'll periodically break up lectures with opportunities for you to think about the material and maybe talk with the people sitting next to you
- To anonymously submit answers, we'll use ChimeIn
- If you have a laptop with you, please go to:
<http://chimein.cla.umn.edu/course/view/2021>
- And answer today's (non-CS) question
- (Can also supposedly set up to answer with a cell phone)

11

Type conversion and casts

- Values are automatically converted between numeric types, sometimes with strange effects:

```
long x = 1000000;
char c = x;
/* c is now 64 */
```

- The act of converting can be written explicitly as a cast operation:

```
long x = 1000000;
char c = (char)x;
/* c is now 64 */
```

12

Local, global, and static

- A variable defined inside a function (local) is usually:
 - Created once per call to the function
 - Visible only inside the function
- Variable can be declared outside any function, global:
 - Exists during the whole program
 - Visible in any (later) function
- If a local variable is declared with keyword `static`:
 - One version for the whole execution
 - Still visible only inside the function
 - E.g., useful for counter function

13

Arithmetic operators

- C has the standard math operators:
 - +, - (both unary and binary)
 - *, multiplication
 - /, integer or floating-point division
 - %, integer division remainder
- Precedence rules define the default grouping
 - E.g., $1 + 2 * 3$ is $1 + (2 * 3)$ i.e. 7, not 9
- When in doubt, use parentheses
 - Rules are mostly, but not always, what you'd expect

14

Assignment abbreviations

- Unary ++ and -- add or subtract 1, respectively
 - E.g., `c++` is short for `c = c + 1`
 - Also called increment and decrement
- Putting a = after an operator makes an update operator
 - E.g., `c += 10` is short for `c = c + 10`
- You can string together multiple assignment left-hand sides
 - `assignment_grade = course_grade = 0;`

15

Comparisons and logic

- Numbers can be compared with the usual operators:
 - <, >
 - <=, >= mean ≤, ≥
 - ==, != mean =, ≠; note double equals
- Integers used for logic (no separate Boolean type):
 - 0 represents false
 - any non-zero interpreted as true, produced as 1
 - (C99 defines `<stdbool.h>`, hasn't caught on)
- Logic operators:
 - `&&` for and, `||` for or, `!` for not
 - `(d != 0) && (n / d < 10)` is safe ("short-circuiting")

16

Arrays in C

- Arrays are the key building block for large data structures
- C arrays have limited features, allowing for simple compilation strategies
 - Local and global arrays can only have fixed size
 - At runtime, no way to ask how long an array is
 - No bounds checking
 - First index is always 0
- Implementation is just a sequence of adjacent values
- C arrays are closely related with C's pointers

17

Array syntax

- Syntax is based on square brackets [] as a suffix
- On a type, inside brackets is the size
- On a value, inside brackets is the index
 - Can appear on left or right side of assignment
 - Note, 0-based means index always less than size

```
double point[3] = {1.0, 1.0, 0.0};
point[0] = -2.0;
double dist =
    sqrt(point[0]*point[0] +
         point[1]*point[1] +
         point[2]*point[2]);
```

18

Multidimensional arrays

- Repeat sets of brackets for tables with more numeric indexes
- E.g., chess board:

```
char board[8][8];
board[0][0] = 'r';
```

- Note, not commas
- Again, only usable when the dimensions are fixed

19

Pointer basics

- A pointer is a value that stores the location of another value
 - As we'll later see in detail, it's implemented as a memory address
- The type of a pointer variable keeps track of the type of what it can point to
 - E.g., pointer-to-char, pointer-to-int
- Type declaration syntax puts a * before the variable name:

```
int num, *num_ptr;
```

20

Basic pointer operations

- & creates a pointer
 - If `x` is an int variable, `&x` is an int pointer, pointing at `x`
- * gets what the pointer points to
 - If `ip` is an int pointer, `*ip` is the int it points at
 - Also called "following" or "dereferencing"
- Multiple levels are possible

```
int i = 5;
int *ip = &i;
int **ipp = &ip;
(**ipp)++;
/* i and **ipp are now 6 */
```

"Declaration resembles use"

21

Pointer arithmetic

- Adding an integer to a pointer advances it by that number of objects
- If `p` is an `int *`, `p + 1` is a pointer to the int next to it
 - Type indicates how much to move
 - Programmer's responsibility to know there is an `int` there
- `p[i]` is equivalent to `*(p + i)`
- Thus, a pointer is roughly equivalent to an array of unknown size
- Array converted into pointer in most places it appears
 - E.g. in function argument type, `int x[]` and `int *x` are equivalent

22

Strings are arrays of characters

- String length is unknown at compile time
 - Thus, type is `char *`
- Length of string indicated by `\0` character after contents
 - "Null termination"
 - Many C programs don't cope well with `\0` characters in their input

```
void caesar_string(char *s, int amt) {
    int i;
    for (i = 0; s[i] != '\0'; i++) {
        s[i] = rotate(s[i], amt);
    }
}
```

23

String constants

- Put text inside double quote marks: "string"
 - Can also include escape sequences
 - Usually put `\n` at end of lines to be printed
- Normally string constants are read-only
 - Type is `const char *`
- Can be used to initialize a modifiable character array

```
char a[] = "hi!";
/* size 4, including \0 */

char a[3] = "hi!";
/* size 3, no \0 */
```

24

Basics of printf

- Standard library function for formatted output
- First argument, format string, may contain format specifiers starting with %
 - Generally, each corresponds to a later argument
- Most basic format specifiers:
 - `%d`: signed `int`, printed in decimal
 - `%g`: `double`, in scientific notation if needed
 - `%s`: `char *`, interpreted as string

```
printf("One %s one is %d\n",
      "plus", 1 + 1);
/* One plus one is 2 */
```

25

if and if-else statements

- Basic way to make decisions. `if` does either something, or nothing:

```
if (x % 2 == 0)
    printf("x is even\n");
```

- `if-else` does one thing if true, other if false

```
if (x % 2 == 0)
    printf("x is even\n");
else
    printf("x is odd\n");
```

26

Blocks and indentation

- Use curly braces to group multiple statements, e.g. inside an `if` statement
 - Without braces, only one statement inside `if`
- Can declare variables inside a block, not visible outside
- Safer to use braces than not: they make grouping clear, like parentheses
 - Example "dangling else" ambiguity: `else` after nested `ifs`
- It is conventional to use indentation to show nesting level
 - But compiler completely ignores whitespace
 - Many opinions and arguments about where to put braces relative to indentation

27

while and for loops

- A `while` loop repeats a statement/block as many times as a condition is true (can be 0 times)

```
while (x > 0) {
    x--;
} /* x is now 0 or negative */
```

- A `for` loop groups a `while` with two other statements, commonly assignment and update of the same variable

```
for (A; B; C) D;
/* is equivalent to: */
A;
while (B) { D; C }
```

28

Leaving in the middle of a loop

- A `break` statement jumps to the end of the innermost enclosing loop
- A `continue` statement jumps to the next iteration of a loop
 - For a `for` loop, the increment part is executed
- A `return` statement ends the entire function
- There is also a `goto` statement, but don't use it
 - One arguable application: jumping out of an outer loop

29

Intermission: HA1 out today

- First hands-on assignment: write a spell checker in C
- Non-interactive, just prints incorrect words and suggestions
- Implement your own separate-chaining hash table
- We will have covered all the C you need by Wednesday's lecture
- Assignment due Monday, September 24th by 11:55pm
- Discussion forum enabled on Moodle page
 - Turn-in will be on Moodle too


30

Debugging and debuggers

- You have probably already had the experience of making a mistake in a program
- Speaking roughly, "debugging" is the process:
 - After you know *that* your code is wrong
 - But before you know *how* it is wrong
- Some kinds of debugging that don't need much tool support:
 - Code review
 - Rubber duck debugging
 - Printf debugging

31

Debugging in the development cycle

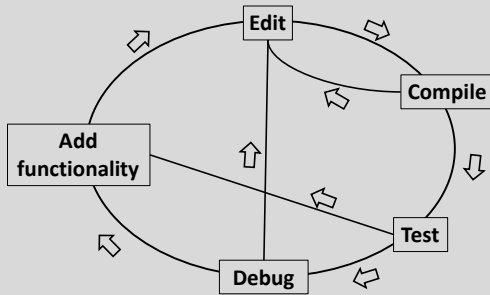

32

What is a debugger for?

- **Not to fix your bugs for you, alas**
 - Computers aren't that smart yet
- **Instead, helps you examine your program's execution in more detail**
 - See what is happening if something is obviously wrong
 - Walk through normal execution, to compare with your expectations
- **Standard practice is source-level debugging**
 - I.e., the debugger shows your program in terms of its source code
 - For binaries, made possible by debugging information (enabled with compiler option `-g`)

33

The GNU debugger GDB

- Standard command-line, source and binary-level debugger on Linux
- Start up with `gdb ./my_program`
- Supply program arguments to the GDB `run` command
 - Abbreviated just `r`
- Or, use `gdb --args ./my_program arg1 arg2`
 - This mode doesn't work for redirection (shell `<`, `>`)
- Today: using GDB as a source-level debugger

34

`break`, `step`, `next`, `continue`

- Normally, GDB will execute your program normally
- To get it to stop to let you look around, turn on a breakpoint with the command `break (b)`
 - Argument can be function name, file and line number, others
- When the breakpoint is reached, your program will stop and you can give GDB commands
- Run the program for one line with `step (s)`
 - Variant `next (n)` does not go into other functions
- To go back to full-speed execution, use `continue (c)`

35

`print`

- The most important command for examining program state is `print (p)`
 - The argument is a source-level (i.e., C) expression
- Some features to know about
 - Can do arithmetic
 - Can refer to any variable in scope
 - Can call functions
 - Can do assignments
 - `p/x` prints in hexadecimal (other formats also available)

36

Crashes, interrupts, and `backtrace`

- GDB will automatically stop if the program runs into a crash like a `segfault` (technically: a Unix signal)
- To stop in the middle of execution, type `Ctrl-C`
 - Good for debugging infinite loops
- The command `backtrace (bt)` summarizes all the currently executing functions
 - Similar to what Java and Python print for an unhandled exception

37

Watchpoints

- A watchpoint is sort of like a breakpoint, but based on data
- The command `watch` takes an argument like `print`
- A watchpoint stops execution when that value changes
- Useful for tracking down problems caused to pointers
- If you use a source-level expression, you'll usually get a software watchpoint, which is slow
 - Later, we'll see hardware watchpoints

38

Pass by value

- The parameters to a C function are always just copies of values from the caller
 - Called "pass by value"
- I.e., they are local variables; changing them has no effect outside the function

```
int global;
void f(int a, int b) {
    a++; /* does not change global */
    b--; /* does not change 2 + 2 */
}
void g(void) { f(global, 2 + 2); }
```

39

Recursion

- A function can call itself, directly or indirectly
- Each instance has its own copy of local variables
 - Used to implement algorithms like quicksort, parsing
- Can also be used as an alternative form of loop
 - Not as common in C as in functional languages
- Each instance usually uses some memory
 - Deep recursion is not too common in C

40

Simulating pass by reference

- What if you want a function to modify caller's variables?
 - Called "pass by reference"
- Simulated in C by passing explicit pointers

```
void increment_by(int *ip, int amt) {
    *ip += amt;
}
void f(void) {
    int x;
    increment_by(&x, 5);
}
```

- Commonly used instead of multiple return values
 - Pointer parameters classified as "in", "out", "in/out"

41

Structures

- Data type that groups multiple named values

```
struct student {
    char *name;
    int grade;
};
```

- Fields accessed with the `.` operator

```
struct student jane;
jane.name = "Jane";
jane.grade = 100;
```

- Compared to OO languages, like objects but without methods, inheritance, or visibility restrictions

42

Pointers to structures

- In more complex situations, you often want to refer to structs with pointers
- `sp->f` is short for `(*sp).f`

```
void mark_off(struct student *sp) {
    sp->grade += 10;
}
```

- Note for Java users: Java object (references) are like structure pointers
 - Even though pointer aspect is not explicit in syntax
 - E.g., two variables can refer to the same object
 - Despite the symbol, Java's `.` is like C's `->`

43

Allocating structures

- If structs are like objects, what's the equivalent of `new`?

```
struct student *sp =  
    malloc(sizeof(struct student));
```

- **Malloc is a basic routine for dynamically allocating memory**
 - Argument is size in bytes
 - Return value has type `void *`, automatically converted
 - Contents can be anything, you must initialize
- **For now, learn as an idiom; we'll see more details later**
 - Use with arrays
 - Changing size with `realloc`
 - Returning memory with `free` (don't need to do this in HA1)

44

Null pointers

- **Pointers have a special value that means not pointing at anything**
 - Often used to represent endpoints or empty data structures
- **Integer 0 converted to pointer, also `NULL` macro**
 - On most systems, internal representation is 0
- **A null pointer counts as false, any other pointer is true**
- **Dereferencing a null pointer usually causes a segfault**
 - So you need to check first

45

Pointer and sharing pitfalls

- **Passing a pointer to data is usually faster than copying it**
 - Only one copy of data exists; it is *shared* by different users
- **But, sharing can also lead to unexpected behavior**
 - E.g., data changing when you do not expect it to
- **Pointer to a local variable is valid only until its function finishes**
 - Attempts to access later may cause a crash
- **Sometimes you do want to make a copy of data**
 - Allocate a new struct/array and copy contents over
 - `strdup` is a convenience function for duplicating a null-terminated string

46

Example: linked list length

- Can iterate over a singly-linked list with a `for` loop:

```
struct list_node {  
    struct list_node *next;  
    int value;  
};  
  
int length(struct list_node *root) {  
    struct list_node *p; int i = 0;  
    for (p = root; p; p = p->next)  
        i++;  
    return i;  
}
```

47

Choose your own adventure

- **Two choices for the rest of today's lecture**
 - More GDB features, demo
 - More C features
- **Register your choice at:**
<http://chimein.cla.umn.edu/course/view/2021>

48

A few more fun operators

- The "ternary" operator `?:` is like an if-then-else

```
printf("Found %d object%s\n", n,  
      ((n == 1) ? "" : "s"));
```
- The comma `,` evaluates two expressions and returns the right-hand one
 - Useful for putting multiple assignments in a `for` loop header
- **`++` and `--` can also be prefixes, and return a value**
 - Prefix versions like `++x` first update, then return new value, "pre-increment"
 - Postfix versions like `x++` update, but return old value, "post-increment"
- **Overusing these operators can make code hard to read**

49

typedef

- Used to create a type name that is a synonym for another type
 - Syntax is like that of a variable declaration

```
typedef char zipcode[5];
zipcode umn = "55455";
```

- Commonly used to save typing "struct":

```
typedef struct list_node node;
node table[100];
```

50

switch statement

- Used for making a choice based on several integer values

```
switch ('a' + (letter % 26)) {
    case 'a': case 'e': case 'i':
    case 'o': case 'u':
        printf("Vowel\n");
        break;
    case 'y':
        printf("Maybe y\n");
        break;
    default:
        printf("Consonant\n");
        break;
}
```

51

The C standard library

- Every C implementation implements a large number of common routines
 - Load the declarations with an appropriate `#include`
 - `stdio.h`: `printf`, `scanf`, `fopen`, `fclose`, `fread`, `fwrite`
 - `stdlib.h`: `malloc`, `exit`, `NULL`, `atoi`, `qsort`
 - `math.h`: `sqrt`, `sin`, `pow`
 - `string.h`: `strlen`, `strcpy`, `memcpy`
 - `assert.h`: `assert`
 - `ctype.h`: `isalpha`, `isspace`
- Still limited compared to Java, C++, or Python
 - Some interfaces have old/poor designs (e.g., `gets`)
 - Lacking general-purpose data structures
 - Other stuff also in a typical OS-specific C library / C runtime

52

The C preprocessor

- The first step of compiling C code is text-level processing
 - Also available as a separate tool, `cpp` on Unix
- Preprocessor directives are lines that start with `#`
- `#include` reads in another file
 - Typically a header (`.h`) file that contains declarations
 - `<>` for system headers, `" "` for program headers
- `#define` creates a macro
 - Synonym for a value that is substituted in later
 - Simple uses similar to `typedef` or `const` variable

```
#define TABLE_SIZE 1000
int table[TABLE_SIZE];
```

53

Conditional compilation

- Use macros and simple arithmetic to decide what code to use

```
#ifndef __i386__
typedef long long int64;
#elif defined(__amd64__)
typedef long int64;
#else
#error "No known 64-bit type"
#endif
```

- `#if 0 / #endif` can "comment-out" code containing comments

54

Function-like macros

- Macros can also define simple computations
 - Implemented by textual substitution

```
#define MAX(x, y) \
    ((x) > (y) ? (x) : (y))
```

- A number of pitfalls to be aware of:
 - Should have parentheses around outside, and each argument
 - Multiple lines need `\` continuation
 - Variables can cause name clashes
 - Multiple side-effects possible with `,`
 - Statement needs `do { ... } while (0)`
- Often better to use a real function, compiler can inline

55